





COVERDECK

S Y S T E M S®

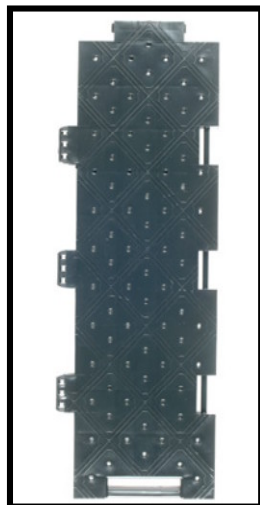

TOP

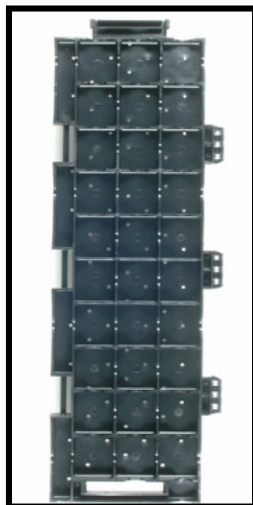

BOTTOM



Under side of TEMPFLOOR

1-661-273-8700

y y y Cctwy j ggnHcevqt { .eqo

TempFloor®

SPECIFICATIONS:

ITEM NUMBER: 2000


DIMENSIONS: 6" x 24"

THICKNESS: 3/4"

TILE WEIGHT: 1.2lbs/ tile

COVERDECK SYSTEMS

TempFloor® is a high-impact plastic modular flooring system that creates a stable temporary floor.

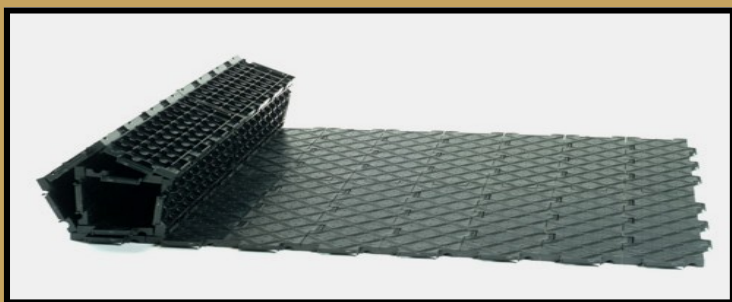

TempFloor®

COVERDECK SYSTEMS

TempFloor® is a high-impact plastic modular flooring system that creates a stable temporary floor. The **TempFloor®** has a unique hinge system that snaps together, allowing the tiles to roll out, making installation a breeze. Each tile has drainage holes that allow water and air to flow freely through and underneath the system. The surface is a textured matte finish with a decorative ribbed diamond pattern giving the floor excellent slip resistance. **TempFloor®** is a raised surface that will help keep your event high and dry.

For use as a temporary sub-floor **TempFloor®** is an outstanding alternative for the typical sub floor made of lumber or plywood because the **TempFloor®** is lighter, lasts longer, and installs faster.

TempFloor® can be used on any number of irregular surfaces including grass, sand, dirt and stone. **TempFloor®** can be used in conjunction with our **CARPET TILE**, or any other **COVERDECK** Tile finishes giving the floor a more elegant appearance.



FEATURES:

- Drains instantly
- Installs easily over irregular Surfaces
- Allows air to circulate
- Slip resistant
- Withstands high-impact

APPLICATIONS:

- Event floors
- Tent floors
- Temporary floor
- Trade shows
- Exhibit floors
- Walkways
- Athletic fields

1-661-273-8700

www.CartwheelFactory.com

