



38325 6th Street East

Palmdale, CA 93550 USA

Telephone 1-661-273-8700 Fax 1-661-885-8300

Web: www.CartwheelFactory.Com Email: Sales@CartwheelFactory.Com

WALL PADS, POST PADS, CURTAIN DIVIDERS



Cushion potential impact zones and enhance your gym's appearance at the same time with our attractive wall pads.

Color Options




Type 1: 1 3/8" X-Link Foam bonded on 1/2" Choose from two filler style thick wafer board and covered with 14 oz. coated vinyl fabric. A 1 inch lip on top and bottom provides for easy installation and wall mounting.

Type 2: Protective Foam is 2" thick of 100 ILD Polyfoam padding. This thickness will help minimize, not eliminate serious injury to head and neck.

The Cartwheel Factory also manufactures custom wall panel padding.

Cut-outs excluded. Call or fax us for quotes.

Both feature a 1/2" thick wafer board base onto which the foam is bonded. Pads are then precision upholstered with an 18oz. coated vinyl fabric.

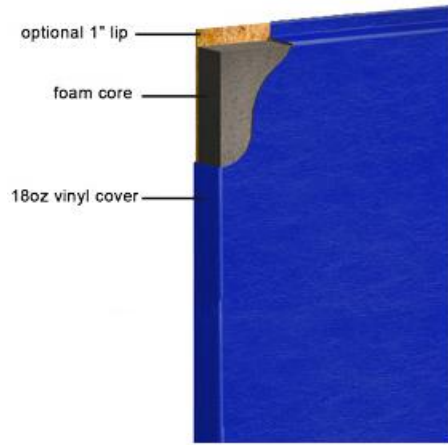

A one-inch lip on top and bottom provide for easy wall mounting.



Type 1: 1 1/4" X-Link Padding

Width Height Thickness Cost

24" 48" 1 1/4"

24" 60" 1 1/4"

24" 72" 1 1/4"

24" 84" 1 1/4"

Type 2: 100 ILD Polyfoam Padding

Width Height Thickness Cost

24" 48" 2"

24" 60" 2"

24" 72" 2"

24" 84" 2"

Call us at 1-661-273-8700 for a quote!

Post Pads

Cartwheel Factory Post Pads feature a 4" thick 50 ILD

Polyfoam core encased in a rugged 18 oz. vinyl-coated polyester cover.

We provide a Velcro closure system for quick, easy installation and removal.

Please specify diameter of post and preferred color when ordering.

6 ft. tall x up to 4" O.D. post

6 ft. tall 4" to 5" O.D. post

6 ft. tall 5" to 6" O.D. post

6 ft. tall 6" to 7" O.D. post

7 ft. tall Up to 4" O.D. post

7 ft. tall 4" to 5" O.D. post

7 ft. tall 5" to 6" O.D. post

7 ft. tall 6" to 7" O.D. post

CWF's WALL PAD/WAINSCOTING SPECIFICATIONS

FOAM FILLER:

Style 1 is filled with 1 1/4" thick crosslink polyethylene.

Style 2 is filled with 2" thick 200 ILD polyurethane.

With the exception of the filler material and the difference in thickness, both types share the following characteristics and components.

BACKING: 1/2" wafer board to which the foam filler is bonded. A 1" lip is provided on both top and bottom to enable pads to be properly installed and aligned. Standard pad width is 2'. Pads are available in 4', 5', 6' and 7' heights.

COVERING: 18 oz. coated vinyl fabric (1000 denier polyester scrim) with a tensile strength of 270x270 lbs./inch and tear strength of 100x90 lbs.

Material complies with minimum flame resistance requirements as specified in CHSC Section 13115 and is so certified by the California Fire Marshall (Reg# FA-48006). Material is also UV protected as well as mildew/rot/fungus resistant.

INSTALLATION:

To be provided by local contractor who shall be responsible for proper inspection and mounting in accordance with suggested procedures.

Cutouts and custom widths shall be made at time of installation; using dimensions provided by the installing contractor onsite for gymnastics martial arts, cheerleading and stunt work.

CWF Flooring, Inc.

38325 6th Street East

Palmdale, CA 93550 USA

Telephone 1-661-273-8700 Fax 1-661-885-8300

Web: www.CartwheelFactory.Com Email: Sales@CartwheelFactory.Com