


# Quiet ComfortPLUS



CWF Flooring, Inc.

NATURAL &  
SUSTAINABLE  
HIGH PERFORMANCE  
UNDERLAYMENT  
PLUS VAPOR BARRIER  
FOR FLOATING FLOORS

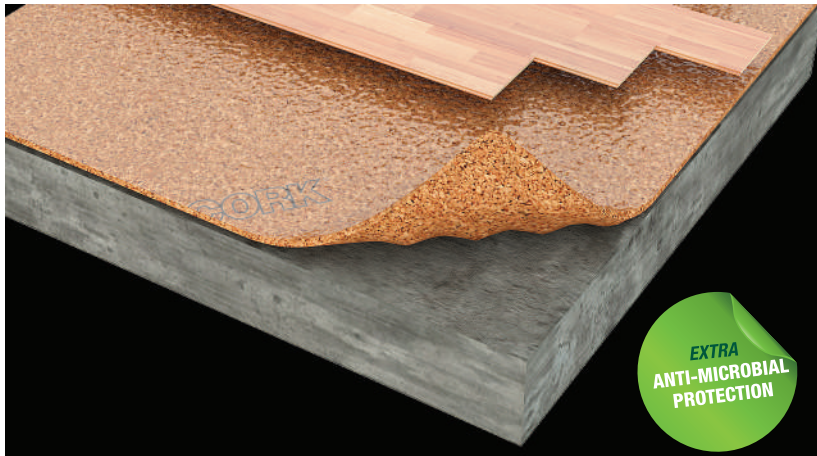

\* The Wave Texture Allows for Increased Air Flow for the Subfloor, Resulting in Extra Protection Against Mold, Mildew & Microbial Growth on the Subfloor

Integrated Moisture Barrier for Easy Installation

The Natural Alternative to Synthetic Foams

Reduces Step Sound & Impact Noise

Increases Walking Comfort - Helps Insulate Cold Floors



#### PRODUCT DESCRIPTION

Wave Textured - High Performance Agglomerated Cork Underlayment Plus Vapor Retarding Barrier for Floating Flooring Applications



#### ENVIRONMENTAL PROPERTIES

Recycled Content (LEED - MR 4)  
Rapidly Renewing Content (LEED -MR 7)  
(85%+ Recycled & Renewable Content)



#### PHYSICAL AND MECHANICAL PROPERTIES

Density: 11.5 to 13 lbs. ft  
Tensile Strength: > 150 KPa  
Compression (100PSI)≈30%  
Recovery: > 90%  
Durability: Lifetime of the Building



CERTIFIED BY  
SCS Global Services



#### ACOUSTICAL RESULTS

(ASTM E 90, E 492, E 413 & E 989)  
IIC 69 (NGC - 7007087)  
STC 67 (NGC- 5007039)  
(6" Concrete Slab w/Ceiling)  
(ASTM E 1007 & E989)  
FIIC 65 (Octave Acoustique)  
(8" Concrete Slab No Ceiling)



#### PACKAGING\*

1m x 10m x 2.5mm (107.75 s/f)  
(39.4" x 32.75' x 0.093")  
\* Others sizes available upon request  
24 Rolls per Pallet



#### OTHER FEATURES & BENEFITS

Helps Bridge Minor Subfloor Defects  
Thermal Insulator - Floors Feel Warmer  
Reduces In Room Step Sound  
Rated for Multi-Family Applications  
Resistant to Mold & Mildew



AMORIM

Amorim Cork Composites

CWF Flooring, Inc.

AcoustiCORK®

SOUND CONTROL UNDERLAYMENTS