

AcoustiCORK® Underlayments

Sustainable Solutions for Virtually All Flooring Surfaces


AcoustiCORK Underlayments Product Selector Guide

AcoustiCORK Underlayments are designed to meet Building Code and Condominium Association requirements for sound control in floor/ceiling assemblies using hardwood, laminates, ceramic tile/natural stone, as well as vinyl and other resilient flooring products. In addition to reducing noise transmission in multi-family and commercial installations, many AcoustiCORK options offer thermal, crack suppression, in room step noise reduction and comfort under foot benefits. Use the chart below and the Sound Test information on the back page to find the AcoustiCORK product that is best suited for your application.


| AcoustiCORK Products | Product Description | Thickness | Function | | | | | Install Guide & Substrate | | | | | Flooring Material: A = Adhered F = Floated N = Nailed | | | | | | | | | | |
|----------------------|--|-----------|----------------------------|-------------------|----------------------|---------------------------|------------------|---------------------------|--------------------------|----------|-----------------------------|---------------|---|-----------------|------------|----------|------|--------|---------|------|--------------------------|---------------------------|--|
| | | | Sound Control Underlayment | Crack Suppression | Comfort Underlayment | Anti-Microbial Protection | Thermal Benefits | Adhered To Substrate (A) | Float Over Substrate (F) | Concrete | Gypsum/Lightweight Concrete | Plywood / OSB | Ceramic/Natural Stone | Engineered Wood | Solid Wood | Laminate | Cork | Bamboo | LVT/LVP | VCT | Sheet Vinyl; Felt-Backed | Sheet Vinyl; Glass-Backed | |
| R12 StressCORK | Cork Rubber Crack Suppression Underlayment | 1.2mm | | X | | | | A | | X | X | | A | | | | | | | | | | |
| PURC 200 | Agglomerated Cork & Recycled PUR Foam Granual Composition | 2.0mm | X | | | | X | | F | X | X | X | | | | | | A*,F | A* | | | F | |
| CorkPLUS 250 | Agglomerated Cork & Recycled EVA Foam Granual Composition | 2.5mm | X | X | | | X | A | F | X | X | X | A | | | | | A,F* | A | A,F* | | A,F* | |
| Quiet Comfort | Wave Textured Premium Floating Floor Underlayment | 2.5mm | X | | X | X | X | | F | X | X | X | | F | F | F | F | | | | | | |
| Quiet ComfortPlus | Wave Textured Premium Underlayment w/ Integrated Vapor Barrier | 2.5mm | X | | X | X | X | | F | X | X | X | | F | F | F | F | | | | | | |
| R25 | Cork Underlayment | 2.5mm | X | | X | | X | | F | X | X | X | | | | F | F | F | | | | | |
| RR300 | High Performance Recycled Rubber | 3.0mm | X | | X | X | X | | F | X | X | X | | A,F* | F, N* | F | F | F | | | | | |
| RC500 | High Performance Recycled Rubber & Cork Underlayment | 5.0mm | X | X | X | X | X | A | F | X | X | X | A | A,F* | F, N* | F | F | F | | | | | |
| PR60 | High Performance Profile Wave Textured Underlayment | 6.0mm | X | | X | | X | A | F | X | X | X | | A,F* | F, N* | F | F | F | | | | | |
| R60 | Premium Cork Underlayment | 6.0mm | X | X | X | | X | A | F | X | X | X | A | A,F* | F, N* | F | F | A,F* | | | | | |
| CRC950 | High Performance Composite Sheet Underlayment | 9.5mm | X | X | X | | X | A | | X | X | X | A | A | | F | | | | | | | |
| RC1000 | High Performance Recycled Rubber & Cork Composition | 10mm | X | X | X | X | X | A | F | X | X | X | A | A | F, N* | F | | A | | | | | |
| S130 | Premium Cork Underlayment | 12.7mm | X | X | X | | X | A | | X | X | | A | A | F, N* | | | A | | | | | |

* Refer to installation recommendations per underlayment, finished flooring product and application


Glued Engineered Hardwood over 6mm R60

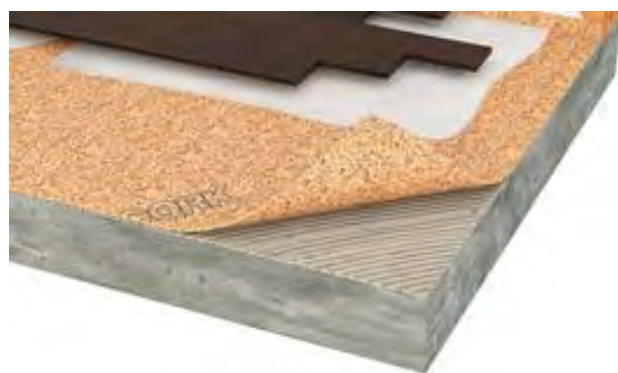

Floating LVT Plank over 2mm PURC 200

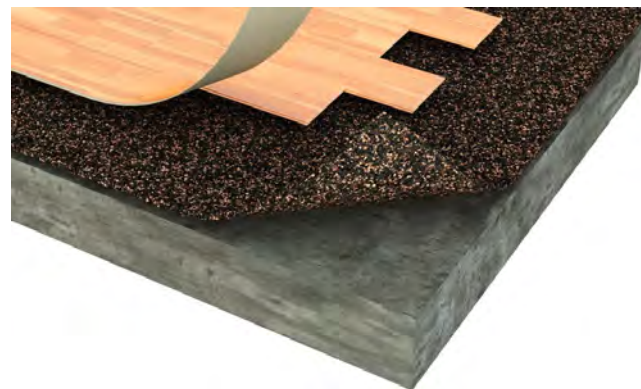

Direct Bonded Ceramic Tile over 6mm R60

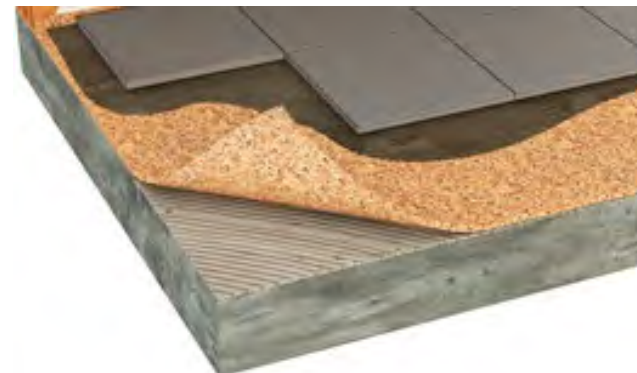

Floating Laminate over 2.5mm Quiet ComfortPlus

